


External PCIe Host Adapter Card

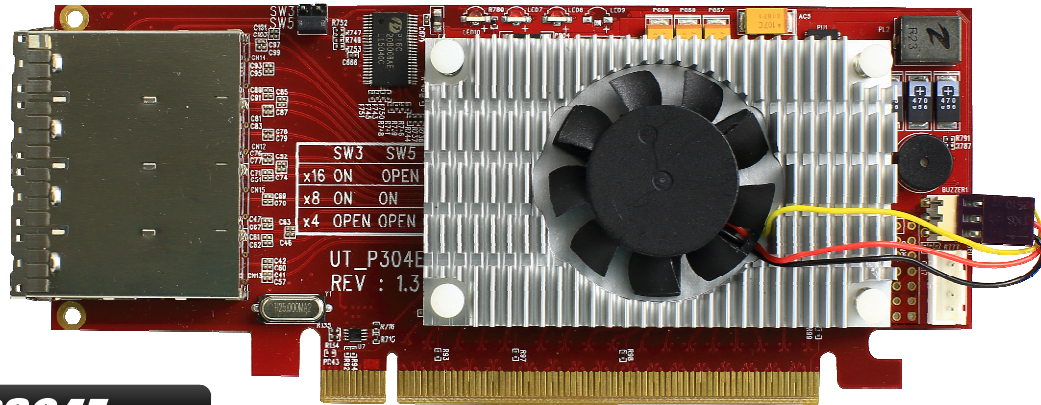

UT_P304E

Features

- Operates at up to 128Gb/s at PCIe Gen 3 speeds
- Half-card form factor
- Switch-based board supports
 PCIe Gen3 x16 for upstream port
 PCIe Gen3 one x16 or PCIe Gen3 two x8 or four x4 for downstream ports
- Support surprise hot plug while I/O accessing

Specifications

Models	UT_P304E
Form Factor	PCIe x16 half-height, half-length add-in card
Dimensions	156 (L) x 73.4(W)mm
Power consumption	Maximum 15W operating in Fan out mode
Connectors	Standard mini-SAS HD SFF-8644 x4 connectors
PCB	PCI Express add-in card standard
PCIe Switch	Broadcom PEX9733, 8.0 GT/s 33-Lane PCI Express Gen 3 Switch
LEDs indication	System Health (Red) System Power (Blue) Downstream port configure as one x16 (Blue) Downstream ports configure as two x8 (Green) Downstream ports configure as four x4 (Blue+Green)
System Alarm	Buzzer beeping for critical event(s) (FAN, Temperature and PCIe link failure)
Warranty	1-years warranty

Note: Specifications and appearance are subject to change without prior notice

<http://www.utran.com.tw>

Address: No.130, Guoji Rd., Tucheng Dist., New Taipei City 23650, Taiwan (R.O.C.)

Phone: +886-2-2262-8681

Fax: +886-2-2273-7500

Email: utran_website@utran.com.tw