


Internal PCIe Host Adapter Card

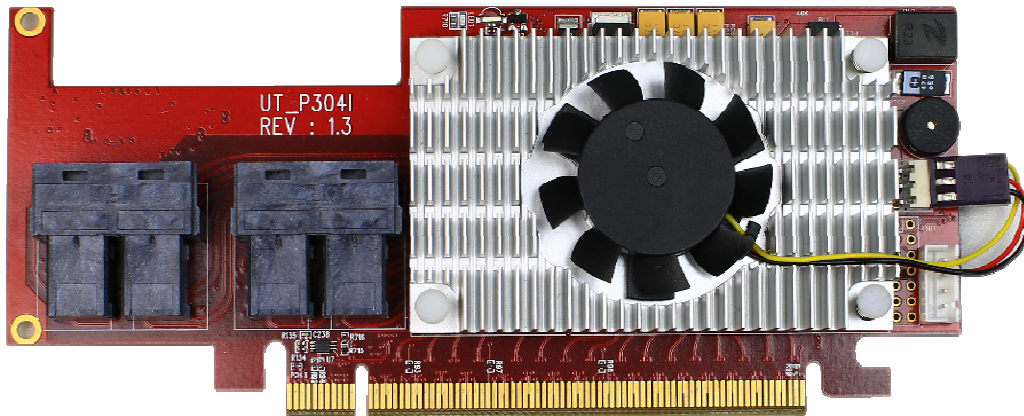

UT_P304I

Features

- Operates at up to 128Gb/s at PCIe Gen 3 speeds
- Half-card form factor
- Switch-based board supports
 - PCIe Gen3 x16 for upstream port
 - PCIe Gen3 four x4 for downstream ports
- Support surprise hot plug while I/O accessing

Specifications

Models	UT_P304I
Form Factor	PCIe x16 half-height, half-length add-in card
Dimensions	156 (L) x 73.4(W)mm
Power consumption	Maximum 15W operating in Fan out mode
Connectors	Standard mini-SAS HD SFF-8643 x4 connectors
PCB	Broadcom Express add-in card standard
PCIe Switch	PLX PEX9733, 8.0 GT/s 33-Lane PCI Express Gen 3 Switch
LEDs indication	System Health (Red) System Power (Blue)
System Alarm	Buzzer beeping for critical event(s) (FAN, Temperature and PCIe link failure)
Warranty	1-years warranty

Note: Specifications and appearance are subject to change without prior notice

<http://www.utran.com.tw>

Address: No.130, Guoji Rd., Tucheng Dist., New Taipei City 23650, Taiwan (R.O.C.)

Phone: +886-2-2262-8681

Fax: +886-2-2273-7500

Email: utran_website@utran.com.tw

UTran brings you into realm of **U**ltra-high-speed data **T**ransmission